

SUBMERSIBLE PUMPS

CK SERIES STAINLESS STEEL


CK series are centrifugal drainage pumps. All stainless steel AISI304 components that come in contact with the water. Supplied with 10 metres of power cable. Twin mechanical seals in a lubricated chamber. For use in drainage, clean, black water and circulation duties. Maximum submersion depth 5 metres. Maximum liquid temperature 50°C. Solids handling of 10mm. CK45 model complete with non return valve. All models are supplied with hose tails.

Features

S/Steel Pump Body
S/Steel Impeller
Max Solids 10mm

Applications

Clean Water
Black Water
Dirty Water

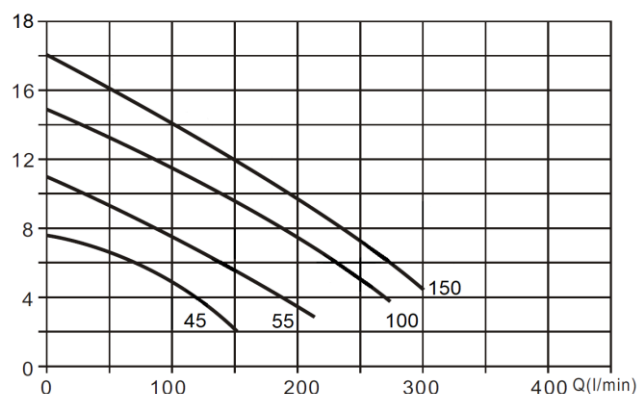

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
CK 45MA	230v	1½"	150/7.5	0.25	1.9	273 x 167 x 167	5.5	9000-2130	
CK 55MA	230v	1½"	216/11	0.37	2.4	360 x 211 x 211	9.6	9000-2135	
CK 100MA	230v	1½"	275/15	0.75	5.2	360 x 211 x 211	10.5	9000-2145	
CK 150MA	230v	1½"	300/18	1.1	7.0	375 x 211 x 211	12	9000-2150	