


ABS ROBUSTA 200 AND 300

The Robusta 200 and 300 series has been designed for fixed or portable installation, and for internal or external applications such as emptying containers and drainage pits, draining of swimming pools or flooded cellars


Model		200	300
Auto-switching levels (mm)	On:	145	165
	Off:	50	75



- Integrated switch for manual operation
- Discharge outlet 1 1/4" and detachable hose adaptor
- Built in non-return valve
- Maximum temperature is 40 °C; or up to 60 °C for intermittent usage (max. 5 minutes)
- Built-in automatic level control, with easily removable float cover for cleaning purposes
- Suitable for small sumps (from 300 x 300 mm)
- Detachable suction ring. When fitted allows pumping down to 3 mm (manual operation only)
- 10m cable with Schuko plug & UK plug adaptor
- Solids handling capacity of 10mm

Model	Voltage	Outlet	LM/HM	Kw	AMP	Solids	Kg	Code	List price
Robusta 200	230v	1 1/4"	140/6	0.36	1.6	10mm	3.8	020-785	£288
Robusta 300	230v	1 1/4"	215/8.5	0.5	2.2	10mm	4.4	020-788	£307

Dimensions (mm)

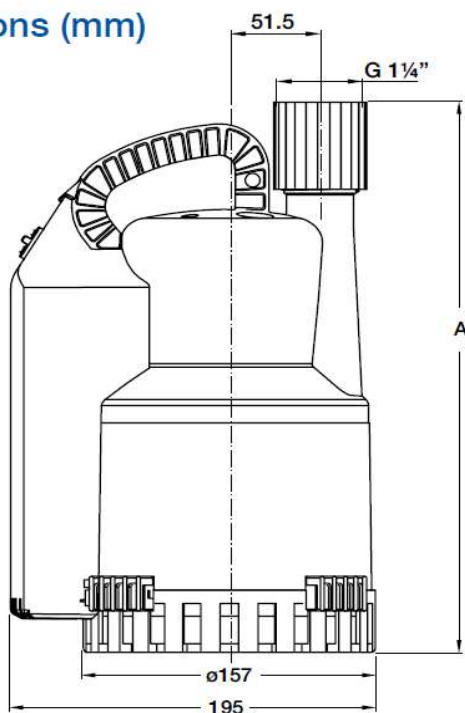

	A
Robusta 200	304
Robusta 300	324

Performance Curves

