

General Data

Model:	VT 150/4/340 C.385
Code:	2000204
Series:	V4
Weight [Kg]	550.00
Submersible pump for sewage with suspended solids	

Hydraulic

Impeller Type:	Vortex Impeller
Delivery DN [mm]:	DN150 PN16
Input DN [mm]:	150
Free Passage [mm]:	130
Impeller Ø [mm]:	270
Max Pump Efficiency [%]:	37.00
Global Efficiency [%]:	35.05
Head [m]:	15.25
Flow [m³/h]:	216.00

Tolerance according to ISO 9906:2012 3B2



Attention: pictures for illustrative purposes

Features

Upper Meccanical seal:	CA/CE/Viton
Lower Meccanical Seal:	SIC/SIC/Viton
Upper Bearing:	Spherical roller bearings
Lower Bearing:	Double raw ball bearing
IP Protection:	IP68
Motor protection:	present
Humidity sensor:	present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	Q8 WF15
Oil Quantity [Kg]:	6.40

Materials




Pump:	Cast Iron EN 1561 EN-GJL-250
Impeller:	Cast iron EN 1561 EN-GJL-250
Motor shaft:	Stainless steel AISI 420
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

Pumped Liquid

Pumped Liquid:	Sewage
Density [Kg/dm³]:	1.1
pH:	6-10
Temperature Range:	0-40°C

Installation


Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	Vertical
Floating on board machine:	not present

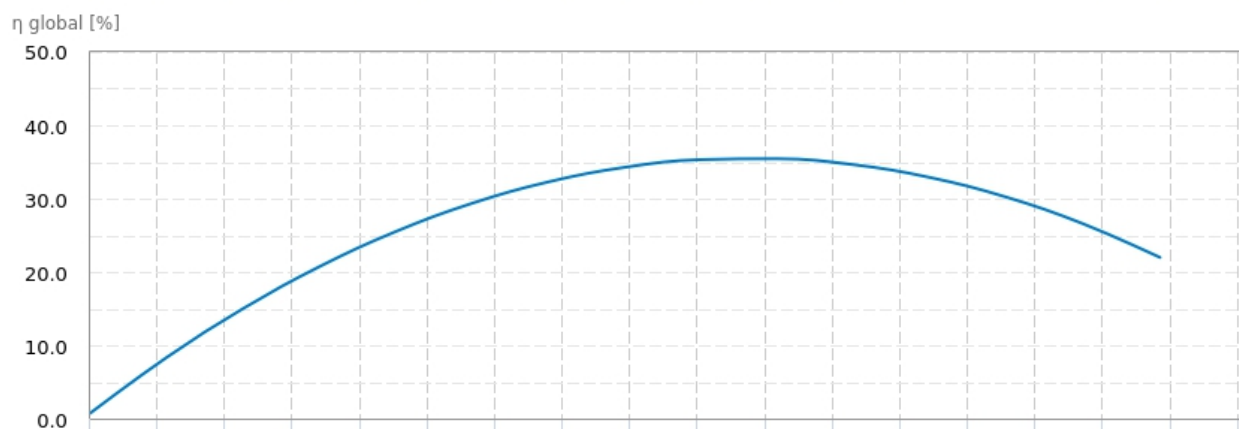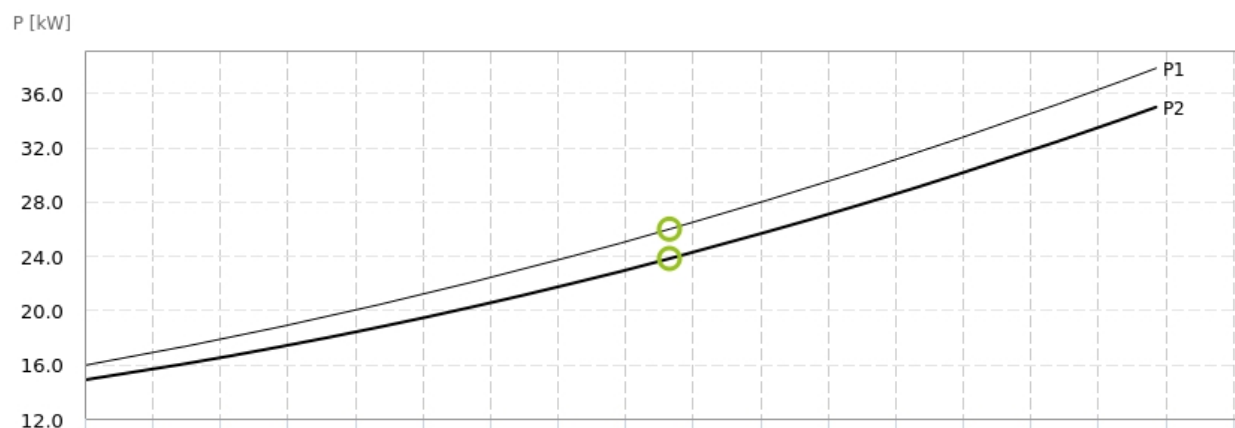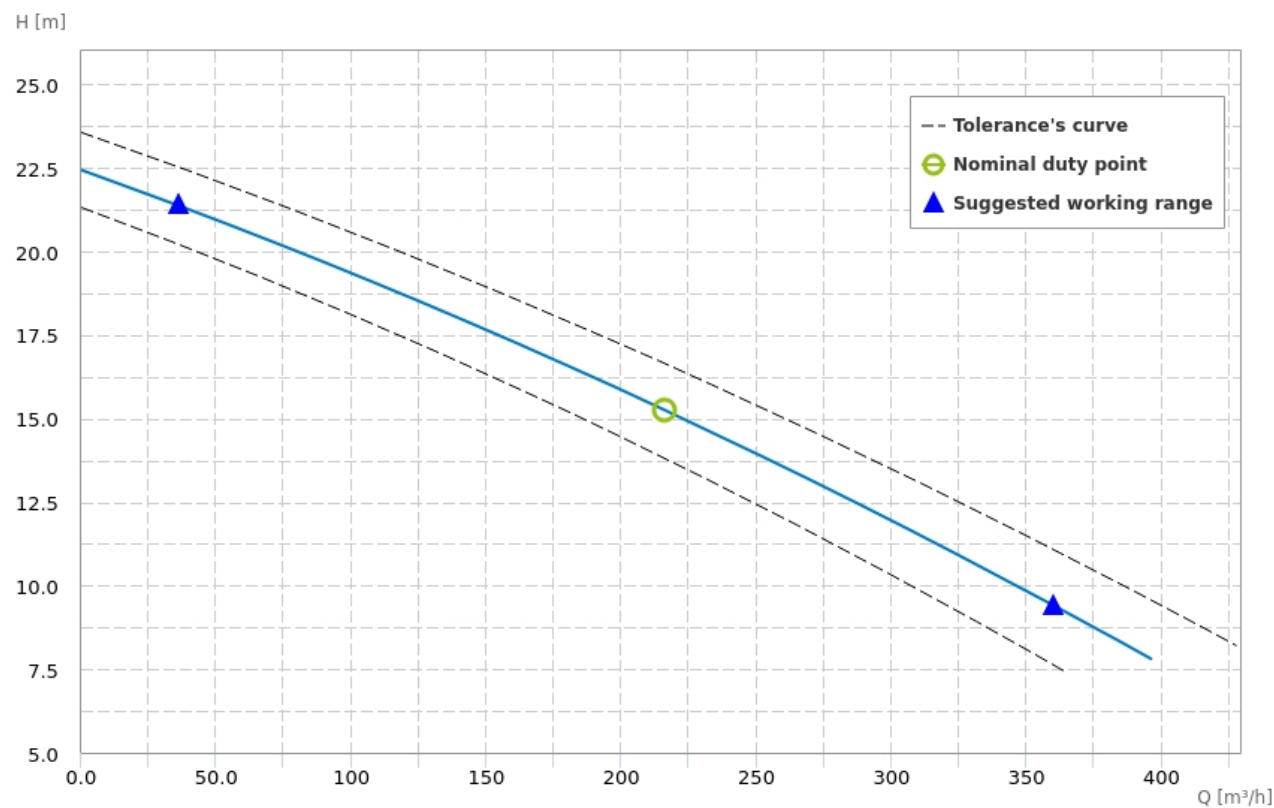

Motor

Motor code:	3521200210
Power P1 [kW]:	38.00
Power P2 [kW]:	37.00
Phases:	3
Frequency [Hz]:	50
Tension [V]:	400
Nominal current [A]:	68.0
Starting current [%]:	466.0
Power Factor:	0.82
R.P.M.:	1450
Starting:	Y-D
Capacitor [μF]:	-
Insulation Class:	F 155°C
Service type:	S1
Max Efficiency [%]:	92.30
Max Efficiency at full load [%]:	91.6
Efficiency at ¾ load [%]:	92.3
Efficiency at ½ load [%]:	92.3
Efficiency class:	IE2

Wiring diagrams

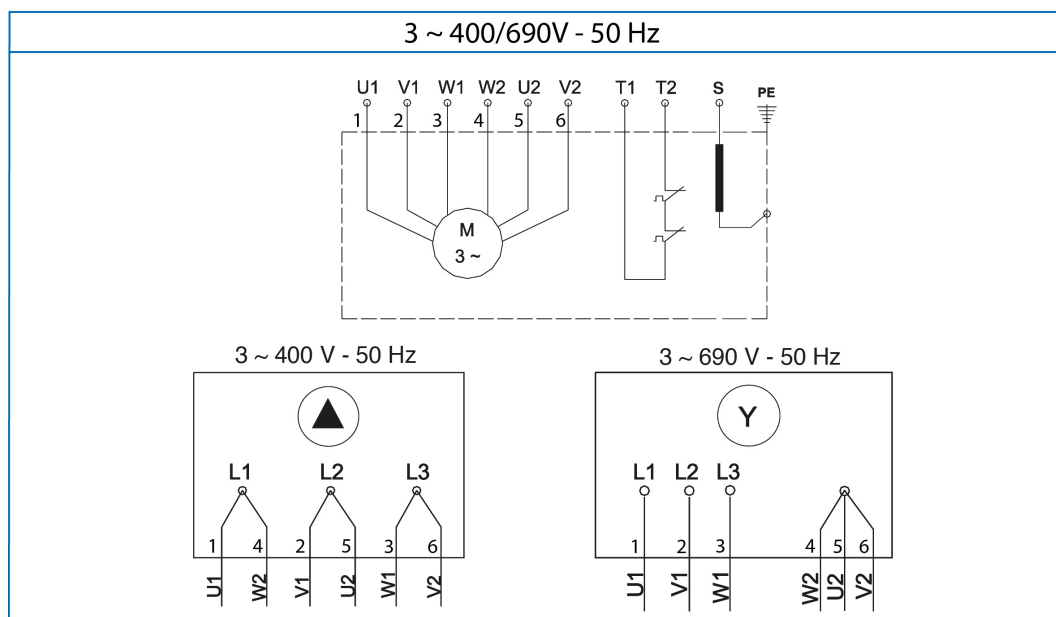

Dimensions drawing

