



SEH-25L



SEH-25H

Applications

- Water irrigation by sprinkling
- Orchard cultivation
- Pumping of well water
- Feeding water into water reservoir
- Feeding or draining water from pond or trough
- Washing of barn and cattle


Specifications

Model		SE-25F	SE-25FH	SEH-25L	SEH-25H
PUMP	Connection Dia	25mm (1")			
	Connection Thread	Outer Pipe Thread			
	Total Head	35m (115F)	42m (138F)	32m (105F)	43m (141F)
	Delivery Volume	110 ℓ/min(29U.S.G/min)	125 ℓ/min(33U.S.G/min)	115 ℓ/min(31U.S.G/min)	135 ℓ/min(36U.S.G/min)
ENGINE	Model	Robin EH025	Robin EH035	HONDA GX25	HONDA GXH50
		Forced Air Cooled 4-Cycle Gasoline Engine			
	Exhaust Volume	24.5cm ³	33.5cc	24.5cc	49.4cc
	Max.Power Output	1.1ps / 0.81kw / 7000rpm	1.6ps / 1.18kw / 7000rpm	1.1ps / 0.81kw / 7000rpm	2.4ps / 1.80kw / 7000rpm
	Fuel	Automobile Non-Lead Gasoline			
	Fuel tank capacity	0.5ℓ	0.65ℓ	0.55ℓ	1.2ℓ
Gross Weight		6.6kg	9.5kg	7kg	12.5kg
Standard Accessories		1 Strainer 3 Hose Bands		2 Hose Coupling 1 Engine Tool	
Dimension (mm)(LxWxH)		398x300x355	393x288x270	375x235x330	390x326x473

Outstanding Features

- Powerful water supply
- Light weight, come with handle for easy mobility
- Superior mechanical seal
- Clean exhaust gas, environmentally friendly
- Easy starting and maintenance, no need to mix gasoline and engine oil
- Fuel consumption is half of 2 cycle engine
- Double life span against 2 cycle engine
- Engine noise is half of 2 cycle engine

Performance Curve

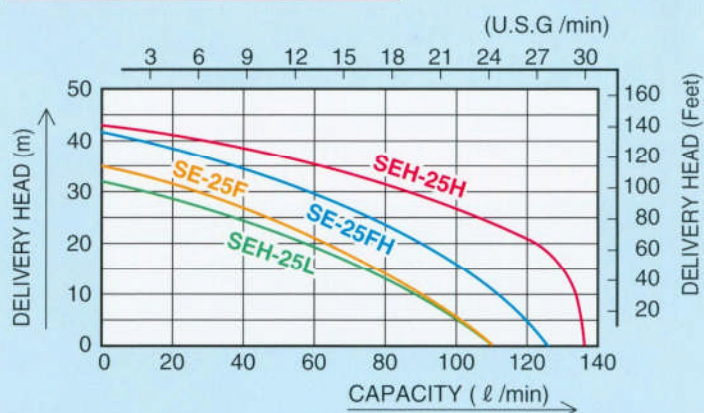

Responding to Various Needs by Advanced Technology

KOSHIN

HIDELS PUMPS

SE-25F • SE-25FH • SEH-25L • SEH-25H

Double fuel saving

Fuel consumption is half of 2 cycle engine

Double reduction in noise level


Engine noise is half of 2 cycle engine

- ### Double life span

2 cycle 200 - 300 hours vs 4 cycle 500 - 600 hours



SE-25FH



KOSHIN LTD.

